

# Lumination™ LED Luminaires

## LDS Series




Project name \_\_\_\_\_  
 Date \_\_\_\_\_  
 Type \_\_\_\_\_

### Product Description:

The LDS series features mechanical designs which allow quick, easy and trouble-free installation of continuous rows with minimum labor for both suspended as well as surface mount applications. Multiple beam distributions and a wide range of lumen levels allow for easily optimized lighting designs for your application and make retrofitting simple. The simplicity of this design makes it seamless and yet impactful in your ceiling. Further, TriGain™ technology gives you enriched color performance with no sacrifice to efficiency. With CRI and R9 above 90 and efficacy at a remarkable 129 lumens per watt, there is no need to choose between premium light and low operating costs. The LDS series is one of the most advanced technological luminaire with the ability to connect to Daintree, and motion sensors.



### Product Dimensions:

CONFIGURATION	4 FT	8 FT
Length "L" (Inches)	50	98
Length "L" (MM)	1270	2489




### Performance Summary:

**Distribution Patterns:** Direct  
**Delivered Lumen Output:** 3,400-17,000lm  
**System Input Power:** 32-150W  
**Efficacy:** 104-129 LPW  
**Input Voltage:** 120-277V & 347V  
**Standard Dimming Control:** 0-10V  
**Dimming Compatibility:** Refer to Dimmer List  
**CCT:** 3000K, 3500K, 4000K  
**Typical CRI:** 83, 90+ TriGain  
**Color Consistency:** 4 Step MacAdam Ellipse  
**Input Frequency:** (Hz): 50/60Hz  
**Power Factor:** >0.9\*  
**Dimensions:** 50 x 7 (4 ft.), or 98 x 4 inches (8 ft.)  
**Mounting:** Suspension or Surface Mount  
**Weight:** <20 lbs.  
**IC rating:** Non-IC Rated  
**Warranty:** 5 Years standard  
**Rated Life:** >L85 @ 60000 hrs.  
**Storage temperature:** -40°C to 60°C  
**Operating temperature:** 0° up to 35° C

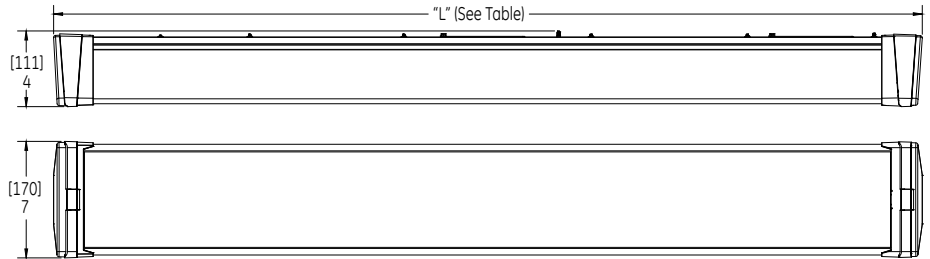

2 mounting brackets come standard with fixture when selecting "PC" and "CS" in the 'MOUNTING' section of ordering information (refer to page 2 for ordering of any other accessories required)



Certified by: 



Please refer to the DLC QPL website for the latest and most complete information.  
[www.designlights.org/QPL](http://www.designlights.org/QPL)

a product of 

### Ordering Information:

LDS

MACRO CODE	FIXTURE TYPE	GENERATION	VOLTAGE	LUMEN	DISTRIBUTION	CRI	CCT	CONTROLS	MOUNTING	FINISH	OPTION
LDS = Direct Suspended	I4 = 4 Ft Independent C4 = 4 Ft Continuous* I8 = 8 Ft Independent C8 = 8 Ft Continuous*	B = 2nd Gen	O = 120V-277V D = 347V	<b>4 FT</b> 34 = 3400 Lumen 40 = 4000 Lumen 50 = 5000 Lumen 65 = 6500 Lumen* 85 = 8500 Lumen*	W0 = Wide W1 = Wide + Uplight* N0 = Narrow N1 = Narrow + Uplight* WW <sup>1</sup> = Wall Wash* L0 = Louvers* L1 = Louvers + Uplight*	T* = 90 with TriGain 8 = 83 CRI *Note: "T" available only in 34, 40, 50, 68, 80, and A0 lumen options	30 = 3000 CCT* 35 = 3500 CCT 40 = 4000 CCT *30 not available for 90 CRI.	VQ = 0-10V Dimming S1 = On/Off occ. S2 = ON/OFF occ & daylight harvesting sensor TQ = Zigbee Enabled TS = Zigbee Enabled with Daintree WFA	CS = 2 Mounting Brackets SM = Surface Mount* See accessories page below for further accessory/mounting options which need to be ordered separately. * Note: not available with Distribution N1, W1, L1. <sup>2</sup> Stainless Steel not available with SM mounting	WHITE = White BLACK = Black ST01 <sup>2</sup> = Stainless Steel*	A = Branch Circuit** EL = Emergency Battery** SPL = Sample with 6' cord and 120Vac wall plug* R10 = RELOC 277V 10' 3-Circuit* P10 = 10' power cord, 14AWG 5-COND P20 = 20' power cord, 14AWG 5-COND S = Single Pack NOTE: Must be applied for 10 pcs or less *Only 1 cord option (SPL, R10, P10, P20) per SKU. *Cord options not available with EL or A options. *SPL option is not UL listed. Only available as independent fixture and only compatible with 120/277V input voltage. *R10 option available with independent fixture and only compatible with 277Vac RELOC installation. **Emergency Battery only available with VQ controls and W0, N0, N1, WW, L0 distributions ***Branch circuit only available with C4&C8 fixture type

LENGTH	LUMEN CODE	LUMEN	POWER
4 ft	34	3400	31
4 ft	40	4000	38
4 ft	50	5000	44
4 ft	65	6500	58
4 ft	85	8500	74
8 ft	68	6800	62
8 ft	80	8000	73
8 ft	A0	10000	87
8 ft	A3	13,000	115
8 ft	A7	17,000	146

























Integrated Sensor option

- Table Lumens at CCT = 3500K
- Lumen Multiplier = 0.97 for CCT = 3000K (N/A for 90CRI)
- Lumen Multiplier = 1.04 for CCT = 4000K
- 5 Watt increment for 347V & EL option
- 2 Watt increment for EA & TQ & TS option

current  
powered by GE




Accessories	Product code
<p>Sample SKU: LDSI4B034W0T40VQCSWHTESPL</p>	<p><b>93073488</b></p>
<p>Power Cord Kit - Options</p>	<p><b>93083225:</b> 10 ft black power cord kit, 14AWG-5COND  <b>93083386:</b> 10 ft white power cord kit, 14AWG-5COND  <b>93083387:</b> 20 ft black power cord kit, 14AWG-5COND  <b>93083388:</b> 20 ft white power cord kit, 14AWG-5COND</p>
<p><b>Suspended Kits - Option 1</b></p> <p>Set of 10' mounting cables</p> 	<p><b>93035285</b></p>
<p><b>Suspended Kits - Option 2</b></p> <p>Set of 10' mounting cables</p>  <p>Power feed cable (6.75 ft.)          #14-4 gauge; includes black, white, green and red (for additional circuits)</p> 	<p><b>93035306<sup>1</sup></b></p> <p><sup>1</sup> Dimming leads not included; #14-4 gauge; includes black, white, green and red (for additional circuits)</p>
<p><b>Suspended Kits - Option 3</b></p>    <p>Upper Mounting Kit (x2)</p>	<p><b>93026986</b></p>
<p><b>Suspended Kits - Option 4</b></p> <p>Set of 10' mounting cables</p>  <p>Power feed cable</p>      <p>Canopy Kit (x1)</p>  <p>Upper Mounting Kit (x2)</p>	<p><b>93035307<sup>1</sup></b></p> <p><sup>1</sup> Dimming leads not included; #14-4 gauge; includes black, white, green and red (for additional circuits)</p>
<p><b>DS Series Starter Kit - White</b>          (5 sets of endcaps &amp; knockout plates)</p>   	<p><b>211994</b></p>
<p><b>DS Series Starter Kit - Black</b>          (5 sets of endcaps &amp; knockout plates)</p>   	<p><b>211995</b></p>
<p><b>DS Series Starter Kit - Stainless Steel/Grey</b>          (5 sets of endcaps &amp; knockout plates)</p>   	<p><b>93051298</b></p>

# Photometric Data: Lumination™ LDS Series

## Distribution Narrow

COEFFICIENTS OF UTILIZATION																			
RC	80%				70%				50%				30%			10%			0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84	
2	100	92	85	80	97	90	84	79	87	81	77	83	79	75	80	77	74	72	
3	92	82	74	68	89	80	73	67	77	71	66	74	69	65	72	67	64	62	
4	85	73	65	59	82	72	64	58	69	63	57	67	61	57	65	60	56	54	
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47	
6	73	60	52	46	71	59	51	45	57	50	45	56	49	45	54	49	44	42	
7	68	55	47	41	66	54	46	41	53	46	40	51	45	40	50	44	40	38	
8	64	51	43	37	62	50	42	37	49	42	37	47	41	36	46	41	36	34	
9	60	47	39	34	58	46	39	34	45	38	33	44	38	33	43	37	33	31	
10	56	43	36	31	55	43	36	31	42	35	31	41	35	31	40	35	30	29	



Effective Floor Cavity Reflectance 0.20

ZONAL LUMEN SUMMARY			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	537.14	N.A.	13.40
0-30°	1131.35	N.A.	28.30
0-40°	1837.88	N.A.	45.90
0-60°	3199.99	N.A.	80.00
0-80°	3936.85	N.A.	98.40
0-90°	3992.86	N.A.	99.80


LUMINANCE DATA (CD/SQ.M)			
Angle in Degrees	0°	45°	90°
45°	5219	3974	3705
55°	4252	2934	2639
65°	4147	2504	2272
75°	4174	2061	1861
85°	2216	831	915

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10	175.00
10-20	501.45
20-30	733.69
30-40	747.87
40-50	596.59
50-60	469.07

Total Luminaire Efficiency = N.A.%

## Distribution Wide

COEFFICIENTS OF UTILIZATION																			
RC	80%				70%				50%				30%			10%			0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	109	104	100	96	106	102	98	95	98	95	92	94	91	89	90	88	86	84	
2	99	91	84	79	97	89	83	78	86	80	76	82	78	74	79	76	72	70	
3	91	80	72	66	88	78	71	65	75	69	64	73	67	63	70	66	62	59	
4	83	71	62	56	81	70	62	55	67	60	54	65	59	54	63	57	53	51	
5	76	63	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44	
6	70	57	48	42	69	56	48	42	54	47	41	53	46	41	51	45	41	39	
7	65	52	43	37	64	51	43	37	50	42	37	48	41	36	47	41	36	34	
8	61	47	39	33	59	47	39	33	45	38	33	44	37	33	43	37	32	30	
9	57	44	35	30	55	43	35	30	42	35	30	41	34	29	40	34	29	27	
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25	



Effective Floor Cavity Reflectance 0.20

ZONAL LUMEN SUMMARY			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	537.16	N.A.	13.40
0-30°	1131.39	N.A.	28.30
0-40°	1837.95	N.A.	45.90
0-60°	3200.11	N.A.	80.00
0-80°	3937.00	N.A.	98.40
0-90°	3993.02	N.A.	99.80


LUMINANCE DATA (CD/SQ.M)			
Angle in Degrees	0°	45°	90°
45°	7805	7735	7595
55°	7388	7294	7083
65°	6896	6646	6416
75°	5871	5459	5078
85°	3634	2651	2221

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10	139.63
10-20	397.53
20-30	594.23
30-40	706.56
40-50	721.43
50-60	640.73

Total Luminaire Efficiency = N.A.%

## Wall Wash

COEFFICIENTS OF UTILIZATION																			
RC	80%				70%				50%				30%			10%			0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	119	119	119	119	116	116	116	116	108	108	108	103	103	103	97	97	97	95	
1	109	104	100	96	106	102	98	95	93	89	86	88	85	83	84	81	79	77	
2	100	92	85	80	97	90	84	79	81	75	71	77	72	68	73	69	66	64	
3	91	81	74	67	89	80	73	67	71	65	59	68	62	58	65	60	56	53	
4	84	73	64	58	82	71	64	58	63	56	51	60	54	49	58	52	48	46	
5	78	66	57	51	76	65	56	50	57	49	44	54	48	43	52	46	42	40	
6	72	60	51	45	70	59	50	45	51	44	38	49	43	38	47	41	37	35	
7	67	54	46	40	66	54	46	40	47	39	34	45	38	33	43	37	33	31	
8	63	50	42	36	61	49	41	36	43	36	30	41	35	30	40	34	29	27	
9	59	46	38	33	58	45	38	33	40	32	27	38	32	27	37	31	27	25	
10	55	43	35	30	54	42	35	30	37	30	25	35	29	25	34	28	24	22	



Effective Floor Cavity Reflectance 0.20

ZONAL LUMEN SUMMARY			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	595.84	N.A.	15.5
0-30°	1279.22	N.A.	33.3
0-40°	2022.99	N.A.	52.7
0-60°	3101.73	N.A.	80.8
0-80°	3746.99	N.A.	97.6
0-90°	3837.66	N.A.	100

LUMINANCE DATA (CD/SQ.M)			
Angle in Degrees	0°	45°	90°
45°	8129	7695	5680
55°	6140	5812	4725
65°	5560	5356	4758
75°	5588	5588	5381
85°	3702	4504	6046

ZONAL LUMEN SUMMARY	
Zone	Lumens
0-10	151.85
10-20	443.98
20-30	683.39
30-40	743.76
40-50	608.43
50-60	470.32

Total Luminaire Efficiency = N.A.%

# Photometric Data: Lumination™ LDS Series


## W1 - Wide + Uplight

W1 - COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																		
RC	80%				70%				50%			30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
0	115	115	115	115	110	110	110	110	101	101	101	92	92	92	85	85	85	81
1	105	100	96	92	100	96	92	89	88	85	83	81	79	77	75	73	71	68
2	96	88	82	76	91	85	79	74	78	73	69	72	68	65	66	63	61	58
3	88	78	70	64	84	75	68	63	69	64	59	64	60	56	59	56	53	50
4	81	70	62	55	77	67	60	54	62	56	51	58	53	49	54	50	46	43
5	75	63	55	48	71	61	53	47	56	50	45	53	47	43	49	44	41	38
6	69	57	49	43	66	55	47	42	51	45	40	48	43	38	45	40	37	34
7	65	52	44	38	62	50	43	37	47	41	36	44	39	34	41	37	33	31
8	60	48	40	34	58	46	39	34	43	37	32	41	35	31	38	33	30	28
9	56	44	36	31	54	43	36	31	40	34	29	38	32	28	36	31	27	25
10	53	41	33	28	51	40	33	28	37	31	27	35	30	26	33	28	25	23

Effective Floor Cavity Reflectance 0.20

W1 - ZONAL LUMEN SUMMARY A			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	859.58	N.A.	10.70
0-30°	1810.53	N.A.	22.60
0-40°	2941.22	N.A.	36.80
0-60°	5122.37	N.A.	64.00
0-80°	6335.42	N.A.	79.20
0-90°	6478.86	N.A.	81.00
10-90°	6255.41	N.A.	78.20
20-40°	2081.65	N.A.	26.00
20-50°	3236.26	N.A.	40.40
40-70°	2953.98	N.A.	36.90
60-80°	1213.05	N.A.	15.20
70-80°	440.22	N.A.	5.50
80-90°	143.43	N.A.	1.80
90-110°	247.46	N.A.	3.10
90-120°	467.63	N.A.	5.80
90-130°	732.03	N.A.	9.10
90-150°	1228.29	N.A.	15.30
90-180°	1523.53	N.A.	19.00
110-180°	1276.06	N.A.	15.90
0-180°	8002.38	N.A.	100.00

W1 - ZONAL LUMEN SUMMARY B	
Zone	Lumens
0-10	223.44
10-20	636.13
20-30	950.96
30-40	1130.69
40-50	1154.62
50-60	1026.53
60-70	772.84
70-80	440.22
80-90	143.43
90-100	93.83
100-110	153.63
110-120	220.17
120-130	264.40
130-140	266.42
140-150	229.84
150-160	167.13
160-170	96.77
170-180	31.35



Total Luminaire Efficiency = N.A.%


## N1 - Wide + Uplight

N1 - COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																		
RC	80%				70%				50%			30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
0	115	115	115	115	110	110	110	110	101	101	101	92	92	92	85	85	85	81
1	105	100	96	92	100	96	92	89	88	85	83	81	79	77	75	73	71	68
2	96	88	82	76	91	85	79	74	78	73	69	72	68	65	66	63	61	58
3	88	78	70	64	84	75	68	63	69	64	59	64	60	56	59	56	53	50
4	81	70	62	55	77	67	60	54	62	56	51	58	53	49	54	50	46	43
5	75	63	55	48	71	61	53	47	56	50	45	53	47	43	49	44	41	38
6	69	57	49	43	66	55	47	42	51	45	40	48	43	38	45	40	37	34
7	65	52	44	38	62	50	43	37	47	41	36	44	39	34	41	37	33	31
8	60	48	40	34	58	46	39	34	43	37	32	41	35	31	38	33	30	28
9	56	44	36	31	54	43	36	31	40	34	29	38	32	28	36	31	27	25
10	53	41	33	28	51	40	33	28	37	31	27	35	30	26	33	28	25	23

Effective Floor Cavity Reflectance 0.20

N1 - ZONAL LUMEN SUMMARY A			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	1095.69	N.A.	13.70
0-30°	2279.9	N.A.	28.50
0-40°	3500.01	N.A.	43.70
0-60°	5212.45	N.A.	65.10
0-80°	6282.94	N.A.	78.50
0-90°	6479.89	N.A.	81.00
10-90°	6195.72	N.A.	77.40
20-40°	2404.32	N.A.	30.00
20-50°	3374.52	N.A.	42.20
40-70°	2321.87	N.A.	29.00
60-80°	1070.49	N.A.	13.40
70-80°	461.06	N.A.	5.80
80-90°	196.95	N.A.	2.50
90-110°	247.50	N.A.	3.10
90-120°	467.46	N.A.	5.80
90-130°	731.67	N.A.	9.10
90-150°	1227.88	N.A.	15.30
90-180°	1523.51	N.A.	19.00
110-180°	1276.02	N.A.	15.90
0-180°	8003.4	N.A.	100.00

N1 - ZONAL LUMEN SUMMARY B	
Zone	Lumens
0-10	284.16
10-20	811.53
20-30	1184.21
30-40	1220.11
40-50	970.21
50-60	742.23
60-70	609.43
70-80	461.06
80-90	196.95
90-100	93.97
100-110	153.53
110-120	219.96
120-130	264.22
130-140	266.31
140-150	229.89
150-160	167.29
160-170	96.93
170-180	31.41



Total Luminaire Efficiency = N.A.%

# Photometric Data: Lumination™ LDS Series


## L1 - Wide + Uplight

L1 - COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD																				
RC	80%				70%				50%				30%				10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
0	115	115	115	115	110	110	110	110	101	101	101	92	92	92	85	85	85	81		
1	105	101	97	94	101	97	93	90	89	86	84	82	80	78	76	74	73	69		
2	97	89	83	78	92	86	80	75	79	75	71	73	70	67	68	65	62	59		
3	89	79	72	66	85	76	70	64	71	65	61	66	61	57	61	57	54	51		
4	82	71	63	57	78	68	61	55	64	58	53	59	54	50	55	51	47	45		
5	76	64	56	50	72	62	54	49	57	51	46	54	48	44	50	46	42	40		
6	70	58	50	44	67	56	48	43	52	46	41	49	43	39	46	41	38	35		
7	65	53	45	39	62	51	44	38	48	41	37	45	39	35	42	37	34	32		
8	61	48	40	35	58	47	40	34	44	38	33	41	36	32	39	34	31	29		
9	57	45	37	32	55	43	36	31	41	34	30	38	33	29	36	31	28	26		
10	53	41	34	29	51	40	33	28	38	32	27	36	30	27	34	29	26	24		

Effective Floor Cavity Reflectance 0.20

L1 - ZONAL LUMEN SUMMARY A			
Zone	Lumens	% of Lamp	% of Fixture
0-20°	1109.35	N.A.	13.9
0-30°	2269.3	N.A.	28.4
0-40°	3540.6	N.A.	44.2
0-60°	5457.15	N.A.	68.2
0-80°	6348.51	N.A.	79.3
0-90°	6481.67	N.A.	81
10-90°	6187.75	N.A.	77.3
20-40°	2431.25	N.A.	30.4
20-50°	3580.92	N.A.	44.7
40-70°	2474.58	N.A.	30.9
60-80°	891.35	N.A.	11.1
70-80°	333.32	N.A.	4.2
80-90°	133.17	N.A.	1.7
90-110°	246.08	N.A.	3.1
90-120°	465.55	N.A.	5.8
90-130°	729.49	N.A.	9.1
90-150°	1225.59	N.A.	15.3
90-180°	1521.44	N.A.	19
110-180°	1275.36	N.A.	15.9
0-180°	8003.11	N.A.	100

L1 - ZONAL LUMEN SUMMARY B	
Zone	Lumens
0-10	293.92
10-20	815.43
20-30	1159.95
30-40	1271.31
40-50	1149.67
50-60	766.88
60-70	558.03
70-80	333.32
80-90	133.17
90-100	93.17
100-110	152.91
110-120	219.47
120-130	263.94
130-140	266.20
140-150	229.91
150-160	167.37
160-170	97.02
170-180	11.46



Total Luminaire Efficiency = N.A.%

## Product Specifications:

### Construction:

- 22 gauge galvanized steel housing
- IP Rating: IP20

### Installation:

- When ordering Lumination DS Series LED Luminaires, 2 mounting brackets are included with each fixture.
- Additional mounting brackets can be ordered if needed, depending on mounting and spacing of application.
- Suitable for damp locations.

### Emergency Battery Option:

- Luminaires with the "E2" option code come equipped with an IOTA Engineering ILB-SLHE-10 emergency battery back-up system to provide egress lighting during power interruptions.
- To calculate delivered lumens for an E2 equipped luminaire use the following formula:

$$\text{Emergency Mode Lumens} = P \times \text{LPW}$$

"P" is the output power of the emergency system (10W for "E2")

"LPW" is the efficacy of the system as determined from the performance data

- For more information refer to [www.iotaengineering.com/ILB/ILBCPManual.pdf](http://www.iotaengineering.com/ILB/ILBCPManual.pdf)

### Electrical System:

- Standard 0-10V dimming, high efficiency drivers
- Class II, replaceable LED driver
- THD: <20%
- PF > 0.9 except for the following conditions:
  - 4ft SKU with 347V
  - 4ft SKU with EL option

For more information and access to all of our resources, including our design tool visit: [www.currentbyge.com](http://www.currentbyge.com)



All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company. © 2019 GE.

