

Refit solutions from GE



Application illustration only, subject lamps not used in photo.

Type C LED U-Tube

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by a GE Lightech™ driver. See reverse for LED tubes and Lightech driver product details.

FEATURES

- T8 U-Tube 1-5/8" and 6" Spacing
- 1700-1800 lumen option available
- >120 total system lumens per watt (LPW)
- 3000K, 3500K, 4000K and 5000K
- 50,000-hour rated life
- UL and cUL listed
 - in compliance with UL 1598 certification
- DLC listed
- NSF Rated for food applications (1-5/8" only)
- Open or Enclosed Fixtures
- Damp rating
- Dimmable (0-10V)
- 5 year warranty

BENEFITS

- Fast and Easy LED upgrade
- Low energy LFL replacement
- 2X longer life than LFL (50,000 vs. 24,000 hours)
- Better quality of light
 - instant on
- No UV
- Shatter resistant (1-5/8" only)
 - prevents breakage and downtime
- Easy disposal, non-hazardous waste

ecomaginationSM

To learn more about saving money and energy, go to: <http://products.currentbyge.com>.

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

current
powered by GE



Product Specifications

Refit LED Tubes

GE Product Code	Description	Bulb Shape	Base	Watts	Case Quantity	Length (In)	Initial Lumens	Color Temp (K°)	CRI	*Rated Life L70 (Hrs)	DLC®
Type C LED U-Tube											
28084	LED14T8/U/835	T8	Med Bi-Pin (G13)	12	15	22.5"	1700	3500	80	50,000	Yes
28164	LED14T8/U/840	T8	Med Bi-Pin (G13)	12	15	22.5"	1700	4000	80	50,000	Yes
43131	LED15T8/G/U6/830	T8	Med Bi-Pin (G13)	13	12	22.5"	1700	3000	80	50,000	Yes
43135	LED15T8/G/U6/835	T8	Med Bi-Pin (G13)	13	12	22.5"	1800	3500	80	50,000	Yes
43143	LED15T8/G/U6/840	T8	Med Bi-Pin (G13)	13	12	22.5"	1800	4000	80	50,000	Yes
43145	LED15T8/G/U6/850	T8	Med Bi-Pin (G13)	13	12	22.5"	1850	5000	80	50,000	Yes

Lightech™ Drivers - Dimming (for 1-5/8")

GE Product Code	Description	# of Lamps
28174	LED14T8/DR/D3L	3

General Characteristics

GE Product Code	28174
Output Current (A)	0.43*3
Input Watt (Max)	42
Input Voltage (V)	120-277V
Input Frequency (Hz)	50/60Hz
Efficiency (%)	> .9%
Output Type	DC
Output Volt Range	26-34V
Dimmability	0-10V
Ambient Temp Min	-4°F
Ambient Temp Max	113°F
Case Temperature	158°F
Driver Rating	>50,000 hours
Casing Length (in)	9.5
Casing Width (in)	1.3
Casing Height (in)	1
Lead Exit Length (in)	26
Input Wire Length (in)	36
Output Wire Length (in)	38

Lightech™ Drivers - Non-Dimming (for 6")

GE Product Code	Description	# of Lamps
38970	LED15T8/DR/UN/2L	2

General Characteristics


GE Product Code	38970
Output Current (A)	0.44*2
Input Watt (Max)	30
Input Voltage (V)	120-277V
Input Frequency (Hz)	50/60Hz
Efficiency (%)	> .9%
Output Type	DC
Output Volt Range	26-34V
Dimmability	None
Ambient Temp Min	-4°F
Ambient Temp Max	113°F
Case Temperature	158°F
Driver Rating	>50,000 hours
Casing Length (in)	9.5
Casing Width (in)	1.3
Casing Height (in)	1
Lead Exit Length (in)	26
Input Wire Length (in)	36
Output Wire Length (in)	38

Lightech™ Drivers - Dimming (for 6")

GE Product Code	Description	# of Lamps
38974	LED15T8/DR/D2L	2

General Characteristics

GE Product Code	38974
Output Current (A)	0.44*2
Input Watt (Max)	30
Input Voltage (V)	120-277V
Input Frequency (Hz)	50/60Hz
Efficiency (%)	> .9%
Output Type	DC
Output Volt Range	26-34V
Dimmability	0-10V
Ambient Temp Min	-4°F
Ambient Temp Max	113°F
Case Temperature	158°F
Driver Rating	>50,000 hours
Casing Length (in)	9.5
Casing Width (in)	1.3
Casing Height (in)	1
Lead Exit Length (in)	26
Input Wire Length (in)	36
Output Wire Length (in)	38

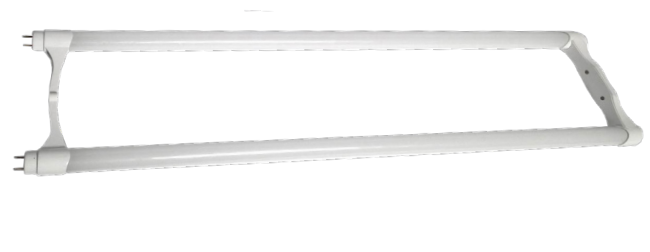

ecomaginationSM



Product is compliant with material restriction requirements of RoHS

current
powered by GE

<http://products.currentbyge.com>

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2017 GE.

LEDL023 (Rev 12/08/17)

