


Batten LED Luminaire

Utility Lighting and More.

The new **Batten LED Luminaire** gives you more performance in tight, demanding situations where utilitarian light is required. The GE Batten is suitable for mounting in any ambient application space and its unique design makes it ideal to mount individually, or run in a continuous row.

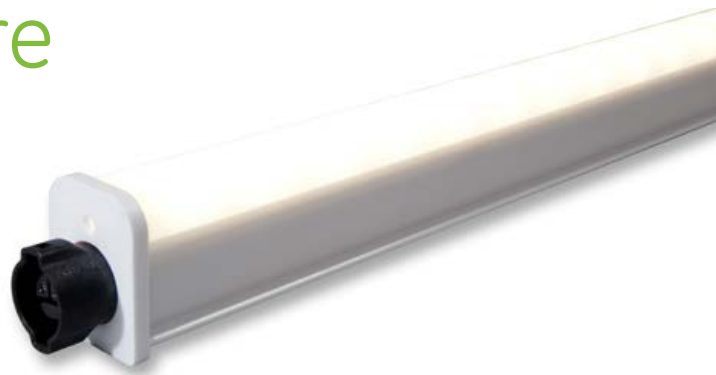

More Lighting Performance

- Maximizes coverage through wide, uniform Lambertian light distribution
- Extruded plastic design protects against moisture, dust and damage
- No decrease of light output in cold settings—as can happen with fluorescent
- Can be used in -40°C to 60°C (-40°F to 140°F)
- Lumen Output: 400 lumens/foot
- 50,000-hour rated life
- Color Temperatures: 7100K, 5000K, 4000K, 3000K
- Sizes: 2ft, 4ft, 8ft

More Savings on Installation and Operation

- Installation is fast and easy with mounting clips
- Integrated power supply eliminates separate drivers
- Easily daisy chain (jumper wire & end-to-end) up to 40 feet of product
- Energy Consumption: 4.5 System watts/ft
- Input Voltage: 120-277V
- Damp Rated
- IP66 Tested



Applications:

- LED Luminaire Fixture



Batten LED Luminaire comes in 3 sizes 2ft, 4ft & 8ft



imagination at work

Components

SKU	Description	Long Description	Package Quantity
94456	GEWI102430BAT-SY	GE 24" 3000K LED Fixture Single Unit	1 Fixture per box
94455	GEWI102440BAT-SY	GE 24" 4000K LED Fixture Single Unit	1 Fixture per box
94459	GEWI104830BAT-SY	GE 48" 3000K LED Fixture Single Unit	1 Fixture per box
94458	GEWI104840BAT-SY	GE 48" 4000K LED Fixture Single Unit	1 Fixture per box
94462	GEWI109630BAT-SY	GE 96" 3000K LED Fixture Single Unit	1 Fixture per box
94461	GEWI109640BAT-SY	GE 96" 4000K LED Fixture Single Unit	1 Fixture per box
64409	GEWI102430BAT	GE 24" 3000K LED Fixtures	4 Fixtures per box
64430	GEWI102440BAT	GE 24" 4000K LED Fixtures	4 Fixtures per box
64431	GEWI102450BAT	GE 24" 5000K LED Fixtures	4 Fixtures per box
94454	GEWI102471BAT	GE 24" 7100K LED Fixtures	4 Fixtures per box
64432	GEWI104830BAT	GE 48" 3000K LED Fixtures	4 Fixtures per box
64433	GEWI104840BAT	GE 48" 4000K LED Fixtures	4 Fixtures per box
64434	GEWI104850BAT	GE 48" 5000K LED Fixtures	4 Fixtures per box
94457	GEWI104871BAT	GE 48" 7100K LED Fixtures	4 Fixtures per box
64472	GEWI109630BAT	GE 96" 3000K LED Fixtures	4 Fixtures per box
64473	GEWI109640BAT	GE 96" 4000K LED Fixtures	4 Fixtures per box
65653	GEWI109650BAT	GE 96" 5000K LED Fixtures	4 Fixtures per box
94460	GEWI109671BAT	GE 96" 7100K LED Fixtures	4 Fixtures per box
96440	GERBL-02FP-10-LC72IN	GE 6ft Leader Cable	1 Leader Cables per bag
96441	GERBL-02MG-10-JC24IN	GE 2ft Jumper Cable	1 Jumper Cables per bag
96442	GEMOUNTCLP	GE Mounting Clips	12 clips per bag

Technical Specifications

Specification Item	Wavelength	Typical Brightness (lumens/fixture)		Energy Consumption (System/Module)	Maximum Run Length	Light Distribution	Dimensions
		Avg	Min				
Batten LED Luminaire 2 Foot	3000K	720	645	9.00	40ft/12 meters	Lambertian	24.7 in x 1.48 in x 2.02 in
	4000K	765	688				
	5000K	810	725				
	7100K	855	770				
Batten LED Luminaire 4 Foot	3000K	1380	1245	16.00	40ft/12 meters	Lambertian	46.7 in x 1.48 in x 2.02 in
	4000K	1470	1325				
	5000K	1555	1400				
	7100K	1650	1485				
Batten LED Luminaire 8 Foot	3000K	2765	2485	32.00	40ft/12 meters	Lambertian	90.9 in x 1.48 in x 2.02 in
	4000K	2945	2650				
	5000K	3115	2800				
	7100K	3310	2975				

Specification Item	Specification
Applications	LED Luminaire Fixture
Operating Environment	-40 °C to +60 °C
Voltage	120- 277 VAC
Warranty	GE offers a limited system warranty of up to five (5) years
System Certifications	UL Listed #E320964, CSA Certified for Sanitation to NSF/ANSI.



www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2015 GE.

SIGN128 (Rev 01/29/15)