


# Tetra® PowerMAX HO

## LED Lighting System

With all new **OptiLens™ X** and groundbreaking energy efficiency

**Tetra® PowerMAX HO** —the remarkable **24V** LED system designed for channel letters delivers incredibly uniform light, installs easily and operates efficiently. The **Tetra® PowerMAX HO** is IP66 and UL wet rated, which makes it more robust and reliable, even under wet weather.

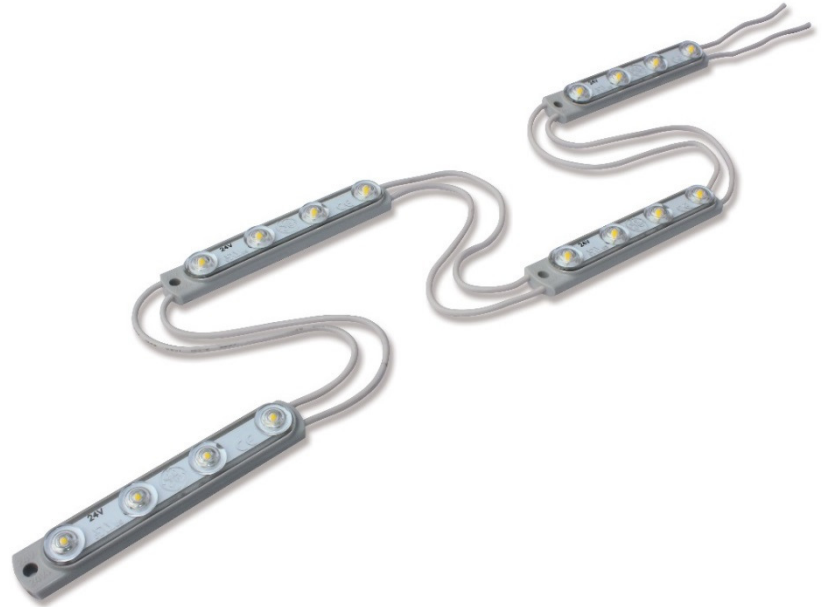

### Powerful all new **OptiLens™ X**

**Tetra® PowerMAX HO** features all new **OptiLens™ X** a **new** patented technology that allows for an incredible **170°** viewing angle. The all **new Tetra® PowerMAX HO** is your best option to significantly reduce energy and maintenance costs.

### Power Supply Loading

The **new 24V Tetra® PowerMAX HO** load up to 64 feet (19.5 m) in the tied configuration or 64 modules of product per GEPS24-100U-NA power supply.

### Improved Stroke Spacing and Installation

The **new 24V Tetra® PowerMAX HO** stroke spacing is quite impressive requiring less product, thanks to the **new OptiLens™ X** wide beam angle and increased light output. PowerMAX HO comes with additional wire length between modules that can be released by cutting a tie wire, eliminating the need to make connections between rows when used in cabinet sign applications or multiple stroke channel letters.

### Tetra® PowerMAX HO Features

- Wide 170° beam angle
- Efficacy: 150 lm/W
- 24 Volt DC, Class 2 (UL), Class III (IEC)
- UL Wet Rated & IP66- no separate enclosure is required
- 5 years limited Warranty

	Can Depth	Coverage
Medium	6-7" (152-178mm)	17" (432mm)
	7-8" (178-203mm)	19" (483mm)
Large	≥ 8" (203mm)	21" (533mm)

### Total GE Reliability

To ensure every Tetra® PowerMAX HO installation will operate brilliantly for years, we perform the most extensive, stringent testing in the industry. We test the LED, water and dust ingress protection, sub-system and complete system at our in-house and independent laboratories around the world. Validation of our designs, components, products and processes include high-temperature, high-humidity and accelerated life testing.

## Components


SKU	Description	Details	Color	Order unit	Pkg Quantity	Additional Information, Stretched Wire
93067977	GEPMH2471-W1CS1	Tetra® PowerMAX HO 24V 7100K	White	Box	5 Strips/Box	35 modules/strip (70 ft/strip)
93067978	GEPMH2450-W1CS1	Tetra® PowerMAX HO 24V 5000K	Warm White	Box	5 Strips/Box	35 modules/strip (70 ft/strip)
93067979	GEPMH2441-W1CS1	Tetra® PowerMAX HO 24V 4100K	Warm White	Box	5 Strips/Box	35 modules/strip (70 ft/strip)
93067980	GEPMH2432-W1CS1	Tetra® PowerMAX HO 24V 3200K	Warm White	Box	5 Strips/Box	35 modules/strip (70 ft/strip)

## Technical Specifications

Description	Wavelength/ CCT	Typical Brightness (Lumens/module)	Typical Brightness, Tied Wire Lumen/ft (Lumen/m)	Energy Consumption (Strip/Module)	Energy Consumption (System/Module)	Power Supply Loading, Tied Wire	Viewing Angle
GEPMH2471-W1CS1	7100K	180	180 (590)	1.2 W/module	1.41 W/module	64 ft (19.5 m) /100WPS	170
GEPMH2450-W1CS1	5000K	180	180 (590)	1.2 W/module	1.41 W/module	64 ft (19.5 m) /100WPS	170
GEPMH2441-W1CS1	4100K	180	180 (590)	1.2 W/module	1.41 W/module	64 ft (19.5 m) /100WPS	170
GEPMH2432-W1CS1	3200K	160	160 (525)	1.2 W/module	1.41 W/module	64 ft (19.5 m) /100WPS	170


Specification Item	Specification (Tied Wire)	Specification (Stretched Wire)																														
LEDs/Module	4	4																														
LEDs/ft (LEDs/m)	4 (13.1)	2 (6.6)																														
Modules/ ft. (Modules/m)	1.0 (3.3)	0.5 (1.6)																														
Cutting Resolution	Cut on wire between every module																															
Power Supply	GEPS24-25-NA Input: 100-305VAC; Output: 24VDC GEPS24D-80U Input: 90-305VAC; Output: 24VDC GEPS24-100U Input: 108-305VAC; Output: 24VDC GEPS24-180U Input: 90-305VAC; Output: 24VDC GEPS24-300U Input: 108-305VAC; Output: 24VDC																															
Maximum Supply Wire Limits	<table border="1"> <thead> <tr> <th></th> <th>18 AWG/0.82 mm<sup>2</sup> Supply Wire</th> <th>16 AWG/1.31 mm<sup>2</sup> Supply Wire</th> <th>14 AWG/2.08 mm<sup>2</sup> Supply Wire</th> <th>12 AWG/3.31 mm<sup>2</sup> Supply Wire</th> </tr> </thead> <tbody> <tr> <td>25W Power Supply</td> <td>120 ft./36.6 m</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>80W Power Supply</td> <td>20 ft./6.1 m</td> <td>25 ft./7.6 m</td> <td>35 ft./10.6 m</td> <td>40 ft./12.1 m</td> </tr> <tr> <td>100W Power Supply</td> <td>20 ft./6.1 m</td> <td>25 ft./7.6 m</td> <td>35 ft./10.6 m</td> <td>40 ft./12.1 m</td> </tr> <tr> <td>180W Power Supply</td> <td>20 ft./6.1 m</td> <td>25 ft./7.6 m</td> <td>35 ft./10.6 m</td> <td>40 ft./12.1 m</td> </tr> <tr> <td>300W Power Supply</td> <td>20 ft./6.1 m</td> <td>25 ft./7.6 m</td> <td>35 ft./10.6 m</td> <td>40 ft./12.1 m</td> </tr> </tbody> </table>		18 AWG/0.82 mm <sup>2</sup> Supply Wire	16 AWG/1.31 mm <sup>2</sup> Supply Wire	14 AWG/2.08 mm <sup>2</sup> Supply Wire	12 AWG/3.31 mm <sup>2</sup> Supply Wire	25W Power Supply	120 ft./36.6 m	-	-	-	80W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m	100W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m	180W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m	300W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m	
	18 AWG/0.82 mm <sup>2</sup> Supply Wire	16 AWG/1.31 mm <sup>2</sup> Supply Wire	14 AWG/2.08 mm <sup>2</sup> Supply Wire	12 AWG/3.31 mm <sup>2</sup> Supply Wire																												
25W Power Supply	120 ft./36.6 m	-	-	-																												
80W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m																												
100W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m																												
180W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m																												
300W Power Supply	20 ft./6.1 m	25 ft./7.6 m	35 ft./10.6 m	40 ft./12.1 m																												
Operating Environment	-40 °C to +60 °C																															
Module Dimensions (h x l x w)	0.42 in x 3.26 in x 0.57 in (10.76 mm x 82.9 mm x 14.4 mm)																															
Warranty	GE offers a limited system warranty of up to five (5) years																															
System Certifications	UL Recognized (C-US) #E219167, UL Classified (C-US) #E229508, CE, ROHS IP66 rated: for dry, damp or wet location.																															

### Viewing Angle



### Mechanical Outline

Dimensions in (inches). Metric equivalent mm.

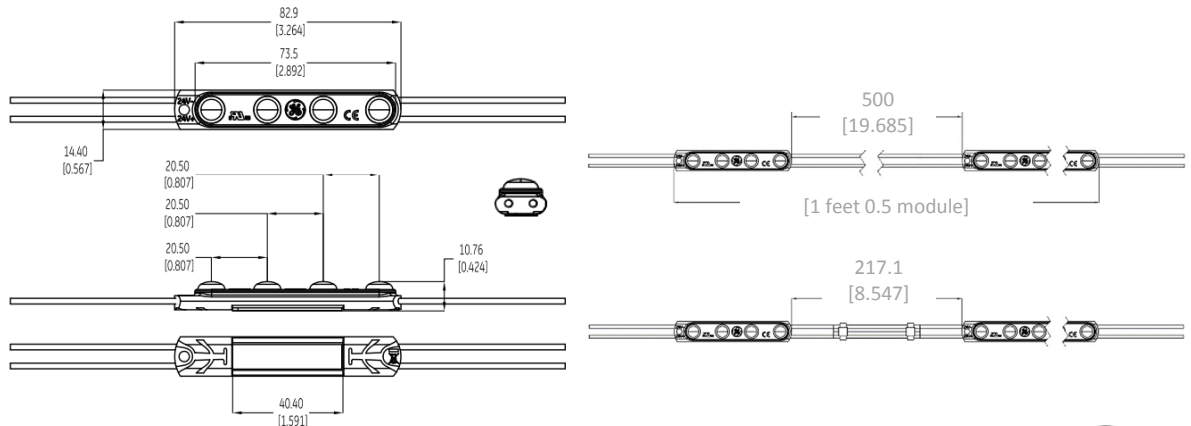

**current**  
powered by GE

All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company.  
©2019 GE

