

GTX™ City LED Signal Modules

200 and 300 mm
Central Light Source
VLC-040 series
Bi-Voltage

GE's 14th generation of LED signal,
building on 15 years of experience
& over 6,000,000 units sold worldwide



Outstanding Performance

- Up to 80% energy savings vs. 50W incandescent bulb.
- Central light source for a uniform looking signal.
- Operates from -40°C to +60°C.
- Phantom Class 5.

Maximum Flexibility

- Low profile module permits efficient installation into existing traffic housings.
- Easy-to-install. Internal mask compatible to fit your unique signaling needs*.

Meets Rigorous Certification & Testing Standards

- Compliant with following sections of EN12368:2006:
 - 5.1 Environmental Requirements
 - 6 Optical Requirements
 - 8 Optical Test Methods
 - 9 Tolerances
 - 10 Marking, Labelling and Product Information
 - 11 Evaluation Conformity
- IP65 Ingress Protection acc. to EN60598 (as per EN12368).
- Designed and tested through GE's rigorous Six Sigma process.
- 100% of GE signals are performance tested and traceable by serial numbers.
- EMC requirements acc. to EN50293 (as per EN12368 sect. 5.2)


* Sold separately.



GTX™ City LED Signal Modules

- 200 and 300 mm

Mechanical Outline Dimensions in mm (inches)

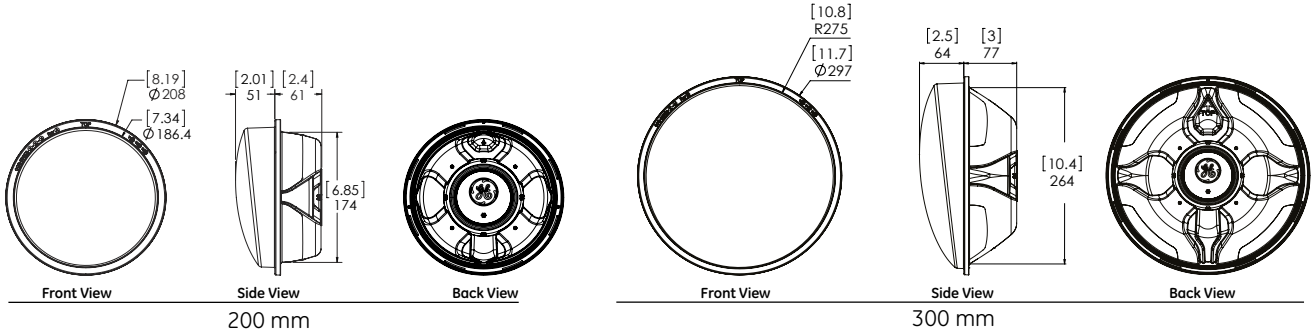

Design Compliance

Test Type	Rating
Impact Resistance	IR3 acc. to EN 60598-1
Environmental Class	A, B & C
Ingress Protection	IP65 ¹ acc. to EN 60598
Signal with Symbol	S1
EMC	Class B acc. to EN 50293
Solar Radiation	Sa
Protection Class	Safety Class II, acc. to EN 60598

Operating Specifications

Parameter	Rating
Operating Temperature Range ²	-40°C to +60°C
Operating Voltage at Full Brightness	110V and 220V
Power factor (Pf)*	> 90%
Total Harmonic Distortion (THD)*	< 20%
Minimum Voltage Turn-Off (VTO)	95V
Turn-On / Turn Off Time	< 100 ms
Front Shell Material	UV Stabilized Polycarbonate

* Measured at 220V

Product Information

Model Number	Front Shell	Size (mm)	Color	Minimum Light Intensity (Cd)	Maximum Light Intensity (Cd)	Nominal Power (W)	Phantom Class	Performance Levels Distribution*	Luminous Intensity*	Uniformity*	Weight kg (lbs)
DR4-RCFB-VLC-040	Black	200	Red	200	2000	10.5W	5	B 2/2	Type W & E	< 1:10	0.7 (1.5)
DR4-YCFB-VLC-040	Black	200	Yellow	200	2000	10.0W	5	B 2/2	Type W & E	< 1:10	0.7 (1.5)
DR4-GCFB-VLC-040	Black	200	Green	200	2000	11.0W	5	B 2/2	Type W & E	< 1:10	0.7 (1.5)
DR4-WCFB-VLC-040	Black	200	White	200	2000	10.5W	5	B 2/2	Type W & E	< 1:10	0.7 (1.5)
DR6-RCFB-VLC-040	Black	300	Red	200	2000	10.5W	5	B 2/2	Type W & E	< 1:10	1.1 (2.4)
DR6-YCFB-VLC-040	Black	300	Yellow	200	2000	10.0W	5	B 2/2	Type W & E	< 1:10	1.1 (2.4)
DR6-GCFB-VLC-040	Black	300	Green	200	2000	11.0W	5	B 2/2	Type W & E	< 1:10	1.1 (2.4)
DR6-WCFB-VLC-040	Black	300	White	200	2000	10.5W	5	B 2/2	Type W & E	< 1:10	1.1 (2.4)

¹ Values are subject to change without notice. Please contact your GE sales representative for most up to date information

² For a higher temperature range, please contact your GE representative.

* According to EN 12368: 2006



www.currentbyge.com

All trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. Current, powered by GE is a business of the General Electric Company.
© 2016 GE.

TRAF321 (Rev 11/24/16)