



READ THOROUGHLY BEFORE INSTALLING
SAVE THESE INSTRUCTIONS FOR FUTURE USE



WARNING

Risk of electric shock

- Turn power off before servicing



CAUTION

Risk of burn

- Do not touch operating luminaire



CAUTION

Risk of injury

- Wear safety glasses and gloves during installation and servicing

GENERAL

This accessory is designed to mount to the Street Dreams Series (Traditional-TH**, Prismatic- P** and Avery). It does not include the Lantern, Gallimore or Vandermore series. Use on other luminaires is not intended or recommended and will violate the warranty.

UNPACKING

This accessory has been properly packed so that no parts should have been damaged during transit. Inspect to confirm.


Note: Scroll cage has one screw upper screw omitted for ease of field assembly.

INSTALLATION

MOUNTING OF CROWN AND RIB ASSEMBLY

To mount the Street Dreams Scroll and Medallion Crown and Ribs Cages:

1. Remove globe assembly from base by rotation counter-clockwise.
2. Invert the globe on a solid surface, covered to protect globe from scratching and other damage.

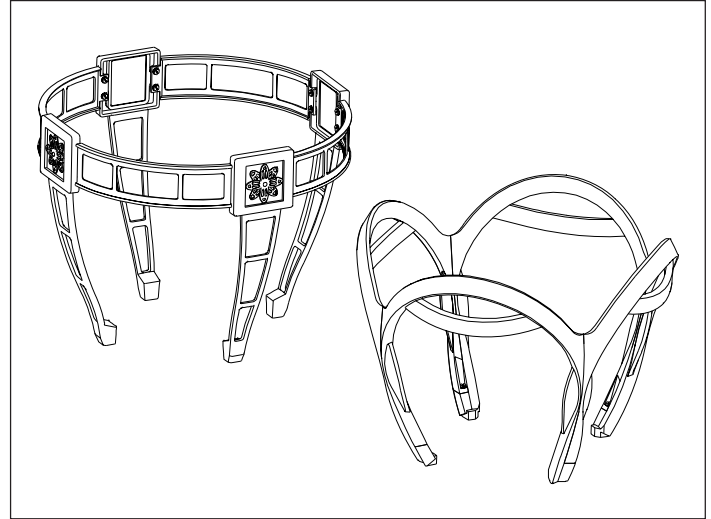

3. Align the ribs of the inverted cage w/ the hooks on the globe ring (see Figure 1)
4. Working in a clockwise pattern, slide each rib of the cage past the globe ring (see Figure 2)
5. Seat base of ribs into pockets on the globe ring
6. Insert the screws provided through globe ring from bottom, into end of ribs and fully tighten (see Figure 3)
7. Return globe assembly to base, rotating clockwise into locked position.

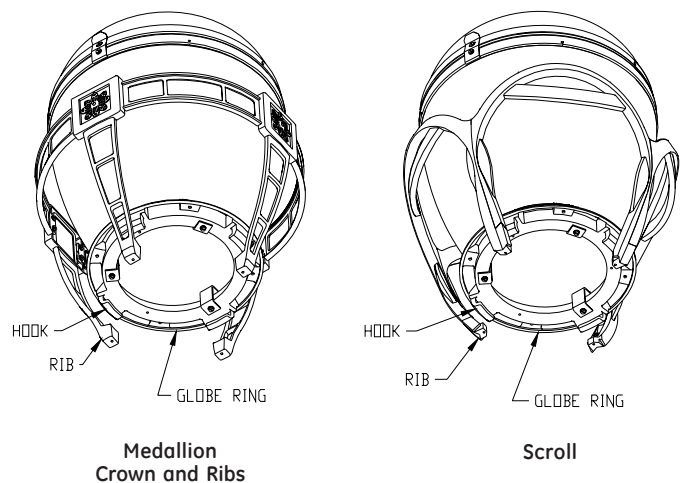


Figure 1

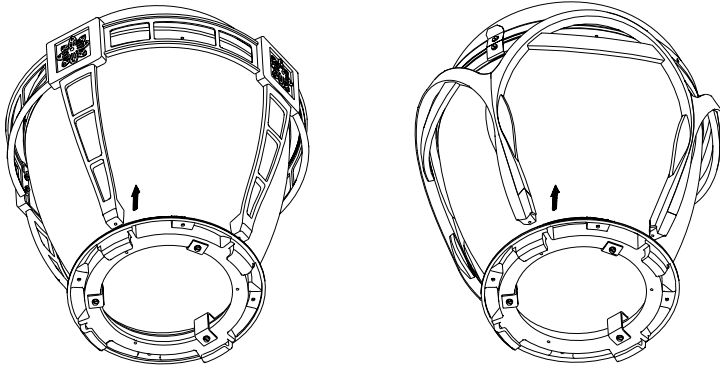


Figure 2

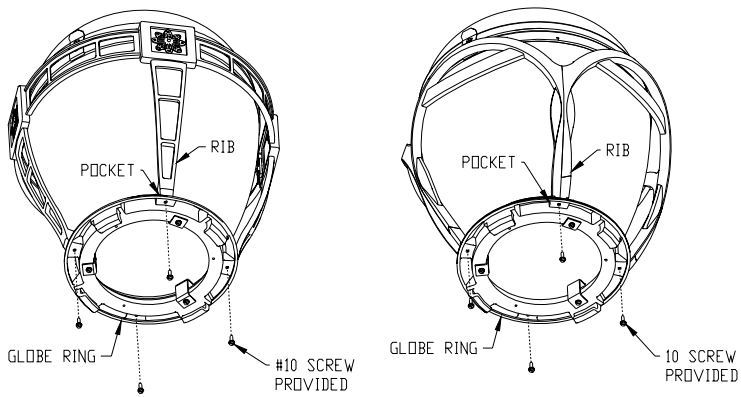


Figure 3



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
 1-888-69-43-533

GE Lighting Solutions is a subsidiary of the General Electric Company. Evolve and other trademarks belong to GE Lighting Solutions. The GE brand and logo are trademarks of the General Electric Company. © 2011 GE Lighting Solutions. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.