




WALLLIGHTER 400 LUMINAIRE

ILLUSTRATIONS SHOWN ARE TYPICAL REPRESENTATIONS

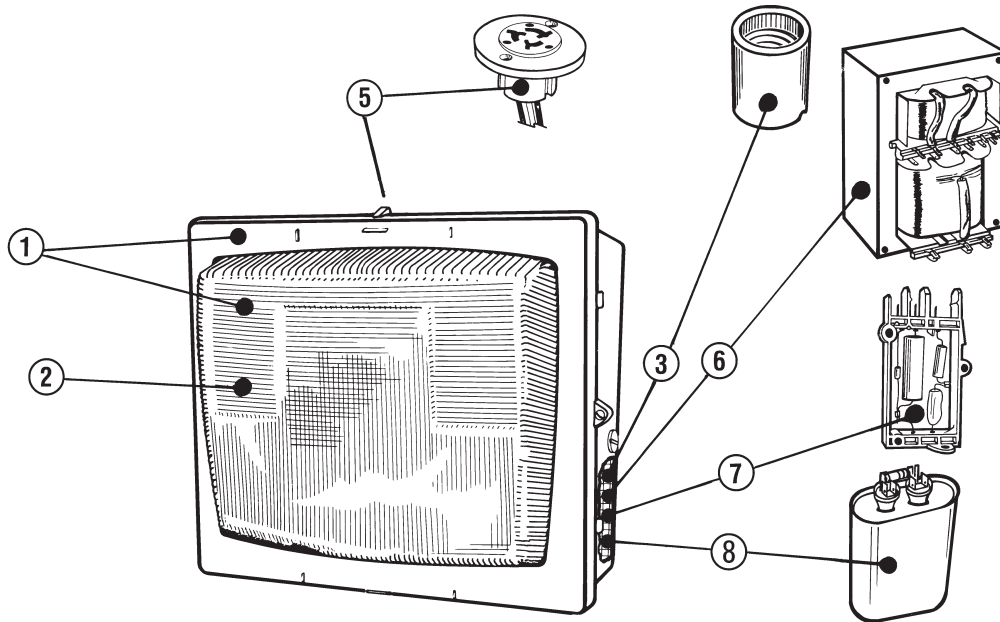

WALLLIGHTER 400 LUMINAIRE

ORDERING INFORMATION FOR GE LIGHTING SOLUTIONS RENEWAL PARTS

REF. NO.	DESCRIPTION	CATALOG NUMBER
1	Reflector and Door Assembly - Gray	35-961710-51
1	Reflector and Door Assembly - Dark Bronze	35-961710-63
1	For ease of installation, it is recommended item 1 be ordered.	
3	Mogul Base Socket with leads	35-964640-51
4	Reflector & Socket Assembly w/gasket & filter (100, 175, 250 Mercury; 70, 100, 150 HPS) (not shown)	35-961710-52
4	Reflector (250 & 400 HPS) (not shown)	35-961710-54
5	PE Receptacle assembly w/leads	35-964960-55
6	Ballast Replacement Kit	See Back Page
7	Ignitor	35-967410-51
8	Capacitor(s): Secure old catalog number from existing part. Use cross reference for new catalog number.	

Continued on back page

W40L
RENEWAL PARTS
WALLIGHTER 400 LUMINAIRE

WALLIGHTER 400 LUMINAIRE

BALLAST REPLACEMENT PARTS

Includes core and coil, capacitor and starting aid where required.

WATTAGE	VOLTAGE	BALLAST TYPE	CATALOG NUMBER
HIGH PRESSURE SODIUM (HPS)			
70	120/208/240/277	HPF-Lag	35-961710-21
70	480	HPF-Reactor	35-961710-36
100	120/208/240/277	HPF-Lag	35-961710-22
100	480	HPF-Reactor	35-961710-37
150	120/208/240/277	HPF-Lag	35-961710-23
150	480	HPF-Reactor	35-961710-38
250	120/208/240/277	Auto-Regulator	35-961710-90
250	480	Auto-Regulator	35-961710-87
400	120/208/240/277	Auto-Regulator	35-961710-88
400	480	Auto-Regulator	35-961710-89
METAL HALIDE AND MERCURY			
175	120/208/240/277	Auto-Regulator	35-961710-91
175	480	Auto-Regulator	35-961710-92
250	120/208/240/277	Auto-Regulator	35-961710-83
250	480	Auto-Regulator	35-961710-93
400	120/208/240/277	Auto-Regulator	35-961710-94
400	480	Auto-Regulator	35-961710-95



GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions is a subsidiary of the General Electric Company. Evolve and other trademarks belong to GE Lighting Solutions. The GE brand and logo are trademarks of the General Electric Company. © 2011 GE Lighting Solutions. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.